



**Bobcat**®

## Zero-Turn Mowers

ZT7000 | ZT6100 | ZT6000 | ZT6000e | ZT5000  
| ZS4000 | WB700 | ZT3500 | ZT3000 | ZT2000



***One Tough  
Animal***®

# PRECISION AT EVERY TURN

From personal lawns to extravagant parks, Bobcat® equipment helps you get tough jobs done. That means more time to enjoy your property and keep crews productive and profitable. Bobcat performance, toughness and versatility make it possible.

## OWN YOUR TURF.

The comprehensive lineup of Bobcat zero-turn mowers is engineered to last longer and work harder, giving you a professional edge in an industry that's all about results.




# ENGINEERED TO KEEP YOU ON TOP OF YOUR GAME

There's a lot that goes into engineering the perfect cut – and it goes beyond just the cutting blade. It takes ingenuity, innovation and intelligence working in harmony. Bobcat zero-turn mower cutting decks are designed to deliver a quality of cut virtually no other zero-turn mower can.

## OPTIMAL MOWING WITH BULLNOSE AIRFX™ CUTTING SYSTEMS

A full-scale system that eliminates negative pressure pockets and lifts grass up to the cutting blade, resulting in a precise, manicured cut that you can use to build your business.

- Steel-fabricated spindles for reliability
- Adjustable front lip for optimized cutting on varying conditions and grass types
- Even clipping dispersal
- Deeper profile for improved vacuum lift
- Highly engineered, bolt-on, replaceable, patented Air-Gap baffles for more efficient airflow and enhanced serviceability
- Bullnose design stands grass up before it reaches the mower blades
- Improved deck cleanliness

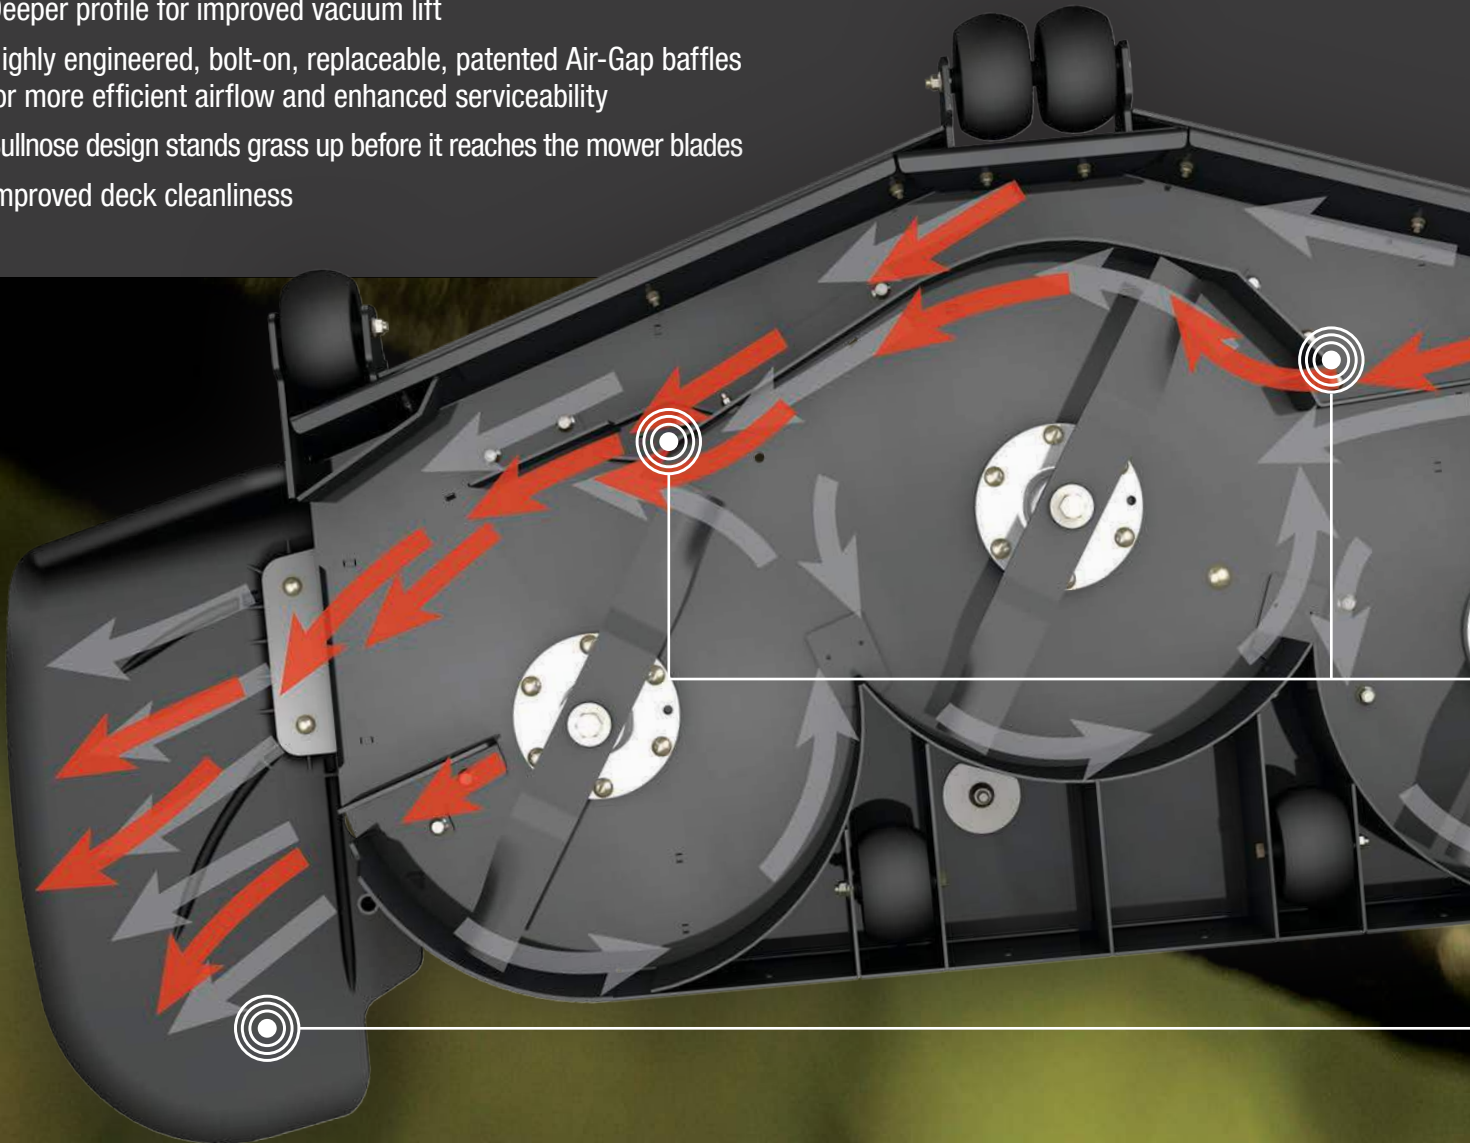

## **SUPERIOR DISCHARGE WITH DURADECK™ CUTTING SYSTEMS**

Tough enough to handle everything commercial jobs dish out:

- Steel-fabricated\* spindles for reliability
- Adjustable front lip for optimized cutting on varying conditions and grass types
- Even clipping dispersal
- Double Wave™ bolt-on baffles to increase airflow throughout the deck

## **RUGGED DURABILITY WITH THE TUFDECK™ PRO AND TUFDECK CUTTING SYSTEMS**

Tough and reliable for a perfectly manicured finish – every time:

- Steel-fabricated spindles for reliability
- Constructed with heavy-gauge, fabricated steel
- Improved vacuum lift
- Easily replaceable, bolt-on front baffles

\*All Bobcat zero-turn mowers have steel-fabricated spindle assemblies except for the ZS4000 36-inch model.



**DEEP DECK DESIGN** with patented Air-Gap baffles increases airflow, delivers an exceptional quality of cut and provides a cleaner deck at the end of the day.

### **CLEAN FINISH**

Powerful airflow aggressively shoots clippings out the extra-large discharge chute.

# MEAN BUSINESS.

Built to boost your bottom line, the ZT7000 is the peak of toughness and best-in-the-business performance. With transport speeds up to 19 mph and mowing speeds up to 13 mph, you can knock out quality results, job after job.



## PREMIUM OPERATOR COMFORT

An extra-high back seat with full mechanical suspension, almond-shaped handles, anti-vibration footplate and smooth, responsive controls provide intuitive and comfortable operation.

## SWING-AWAY BUMPER AND HITCH RECEIVER

The rotating bumper – with the additional hitch receiver included – offers fast access to internal components, making tune-ups more efficient.

## HIGH-CAPACITY DUAL FUEL TANKS

Fuel up, then fill up your schedule. Dual fuel tanks give you 15 gallons of capacity to keep you going ... and earning.

## HIGH-SPEED MOWING

Transport speeds up to 19 mph and cutting speeds up to 13 mph allow for increased productivity.



**2000 HOURS** OR **3 YEARS** LIMITED WARRANTY

## HIGH-PERFORMANCE ENGINE

A Kawasaki® FX1000V 35.0 hp or FX1000V-EFI 38.5 hp engine delivers major commercial-grade strength – so you can get more done, more efficiently.

## COMMERCIAL-GRADE TRANSMISSION

Rugged Hydro-Gear® ZT-5400 hydrostatic transaxles provide maximum output torque and smooth, steady operation at high speeds. A two-speed foot pedal enables transport speeds of up to 19 mph.

## FRONT LED LIGHT

Sundown is no excuse to slow down. The ZT7000 includes a bright, high-intensity LED light that can show you the way to a fine finish.

## BULLNOSE AIRFX DECK

A 61- or 72-inch AirFX deck with Air-Gap baffles offers efficient airflow and superior vacuum lift while rugged, steel-fabricated spindles assure reliable performance. Its unique bullnose design stands grass up before it reaches the mower blades for an unmatched, quality cut.

## 26-INCH DIAMETER DRIVE WHEELS

Enjoy the speed, superior ride and minimal ground disturbance of new 26-inch drive wheels.

## 15-INCH NO-FLAT CASTER WHEELS

Reliable wheels reduce downtime and improve handling.

# ZT7000

## COMMERCIAL



MODEL NUMBER	9997010	9997011	9997064	9997065
<b>ENGINE</b>				
Model	Kaw FX1000V	Kaw FX1000V	Kaw FX1000V EFI	Kaw FX1000V EFI
Horsepower	35.0 hp (26.0 kW)	35.0 hp (26.0 kW)	38.5 hp (28.7 kW)	38.5 hp (28.7 kW)
Displacement	60.9 cu. in. (999 cc)	60.9 cu. in. (999 cc)	61.0 cu. in. (999 cc)	61.0 cu. in. (999 cc)
Fuel Capacity	15.0 gal. (56.7 L)	15.0 gal. (56.7 L)	15.0 gal. (56.7 L)	15.0 gal. (56.7 L)
Air Filter	Canister Air Filter	Canister Air Filter	Canister Air Filter	Canister Air Filter
<b>ELECTRICAL</b>				
Charging System	15 amp	15 amp	15 amp	15 amp
Clutch	250 lbf. (1112 N)	250 lbf. (1112 N)	250 lbf. (1112 N)	250 lbf. (1112 N)
<b>DECK</b>				
Mower Deck	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard
Width	61.0 in. (1549 mm)	72.0 in. (1828 mm)	61.0 in. (1549 mm)	72.0 in. (1828 mm)
Adjustable Anti-Scalp Rollers	6	7	6	7
Cutting Height	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)
Blade Tip Speed	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>				
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	87.0 in. (2209 mm)	87.0 in. (2209 mm)	87.0 in. (2209 mm)	87.0 in. (2209 mm)
Machine Weight (wet)	1500 lb. (680 kg)	1541 lb. (698 kg)	1500 lb. (680 kg)	1541 lb. (698 kg)
<b>TRANSMISSION</b>				
Type	HG ZT-5400 2-Speed Hydrostatic Transaxles	HG ZT-5400 2-Speed Hydrostatic Transaxles	HG ZT-5400 2-Speed Hydrostatic Transaxles	HG ZT-5400 2-Speed Hydrostatic Transaxles
Pump Displacement	0.9 cu. in. (16 cc)	0.9 cu. in. (16 cc)	0.9 cu. in. (16 cc)	0.9 cu. in. (16 cc)
Oil Capacity	1.4 gal. (5.9 qt.) each	1.4 gal. (5.9 qt.) each	1.4 gal. (5.9 qt.) each	1.4 gal. (5.9 qt.) each
Forward Speed	19.0 mph (30.5 km/hr.)*	19.0 mph (30.5 km/hr.)*	19.0 mph (30.5 km/hr.)*	19.0 mph (30.5 km/hr.)*
Reverse Speed	7.5 mph (12.0 km/hr.)**	7.5 mph (12.0 km/hr.)**	7.5 mph (12.0 km/hr.)**	7.5 mph (12.0 km/hr.)**
<b>WHEELS</b>				
Drive Wheel Size	26 x 12-12	26 x 12-12	26 x 12-12	26 x 12-12
Front Caster Wheel Size	15 x 6.5-6, No-Flat	15 x 6.5-6, No-Flat	15 x 6.5-6, No-Flat	15 x 6.5-6, No-Flat
Caster Arm Attachment	Bolt-On	Bolt-On	Bolt-On	Bolt-On
<b>SEAT</b>				
Description	Extra-High Back, Full Mechanical Suspension Seat	Extra-High Back, Full Mechanical Suspension Seat	Extra-High Back, Full Mechanical Suspension Seat	Extra-High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>				
	3-year/2,000-hour Limited Warranty			

\*0-13.0 mph cutting; 13.0-19.0 mph transport

\*\*5.0-7.5 mph transport

# MAKE THE CUT EVERY TIME.

Built for anyone who demands as much from their machine as they demand from themselves. The ZT6100 has the power, speed and fuel capacity you need for hours of uncompromising mowing power.



#### **PREMIUM OPERATOR COMFORT**

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive and comfortable operation.

#### **SWING-AWAY BUMPER AND HITCH RECEIVER**

The rotating bumper – with the additional hitch receiver included – offers fast access to internal components, making tune-ups more efficient.

#### **DUAL FUEL TANKS**

Armed with all-new 15-gallon capacity dual fuel tanks, the ZT6100 keeps operators at peak productivity.



**2000**  
HOURS

OR

**3**  
YEARS

LIMITED  
WARRANTY

#### **POWERFUL ENGINE PERFORMANCE**

A Kawasaki FX850V-EFI 29.5 hp engine puts professional-grade power and performance at your command for whenever the job demands it.

#### **COMMERCIAL-GRADE TRANSMISSION**

Reliable, versatile and innovative, Hydro-Gear ZT-4400 transaxles shift your performance into high gear with maximum output torque and ground speeds up to 12 mph.

#### **DURABLE FRAME**

Mow through tough jobs. A heavy-duty, structural tubed frame design provides maximum durability that's engineered to withstand tough surprises hidden in the turf.

#### **BULLNOSE AIRFX DECK**

The deep-profile 61-inch bullnose AirFX deck is equipped with rugged, steel-fabricated spindles and patented Air-Gap baffles. It delivers a premium, quality cut with innovative technology that lifts grass to the cutting blade.



# ZT6100

## COMMERCIAL



<b>MODEL NUMBER</b>	<b>9996013</b>
<b>ENGINE</b>	
Model	Kaw FX850V EFI
Horsepower	29.5 hp (22.0 kW)
Displacement	52.0 cu. in. (852 cc)
Fuel Capacity	15.0 gal. (56.7 L)
Air Filter	Canister Air Filter
<b>ELECTRICAL</b>	
Charging System	15 amp
Clutch	225 lbf. (1000 N)
<b>DECK</b>	
Mower Deck	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard
Width	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	6
Cutting Height	1.0-5.5 in. (25-139 mm)
Blade Tip Speed	18,500 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer
<b>FRAME</b>	
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	83.0 in. (2108 mm)
Machine Weight (wet)	1464 lb. (664 kg)
<b>TRANSMISSION</b>	
Type	HG ZT-4400 Hydrostatic Transaxles
Pump Displacement	0.7 cu. in. (12 cc)
Oil Capacity	1.1 gal. (4.4 qt.) each
Forward Speed	12.0 mph (19.3 km/hr.)
Reverse Speed	4.0 mph (6.4 km/hr.)
<b>WHEELS</b>	
Drive Wheel Size	24 x 12-12
Front Caster Wheel Size	13 x 6.5-6
Caster Arm Attachment	Bolt-On
<b>SEAT</b>	
Description	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever
<b>WARRANTY</b>	3-year/2,000-hour Limited Warranty

# WIN A TURF WAR.

The versatility and dependability of the ZT6000 will satisfy the toughest customers and give your crew something to fight over.



## HIGH-PERFORMANCE ENGINE

The Kawasaki FX801V 25.5 hp engine delivers power and performance to tackle the toughest jobs day after day.

## COMMERCIAL-GRADE TRANSMISSION

Innovative, reliable and versatile, the Hydro-Gear ZT-4400 transaxles help you step up your game with high maximum ground speeds that get jobs done faster.

## DURABLE FRAME

Stay out on the job and out of the shop with a heavy-duty, structural tubed frame that provides maximum durability.

## BULLNOSE AIRFX DECK

The deep-profile 52- or 61-inch AirFX deck is equipped with rugged, steel-fabricated spindles and patented Air-Gap baffles. Its unique bullnose design lifts grass up so steel blades can cut it down – giving you a cleaner cut and better lawn.

## PREMIUM OPERATOR COMFORT

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive and comfortable operation.

## DUAL FUEL TANKS

Armed with all-new 15-gallon capacity dual fuel tanks.

## INCREASED PRODUCTIVITY

Ground speeds up to 12 mph.

**2000**  
HOURS

OR

**3**  
YEARS

LIMITED  
WARRANTY

# ZT6000

## COMMERCIAL



MODEL NUMBER	9996010	9996011
<b>ENGINE</b>		
Model	Kaw FX801V	Kaw FX801V
Horsepower	25.5 hp (19.0 kW)	25.5 hp (19.0 kW)
Displacement	52.0 cu. in. (852 cc)	52.0 cu. in. (852 cc)
Fuel Capacity	15 gal. (56.7 L)	15 gal. (56.7 L)
Air Filter	Canister Air Filter	Canister Air Filter
<b>ELECTRICAL</b>		
Charging System	15 amp	15 amp
Clutch	225 lbf. (1000 N)	225 lbf. (1000 N)
<b>DECK</b>		
Mower Deck	AirFX Cutting System	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard
Width	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	6	6
Cutting Height	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)
Blade Tip Speed	18,586 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>		
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	83.0 in. (2108 mm)	83.0 in. (2108 mm)
Machine Weight (wet)	1371 lb. (621 kg)	1421 lb. (644 kg)
<b>TRANSMISSION</b>		
Type	HG ZT-4400 Hydrostatic Transaxles	HG ZT-4400 Hydrostatic Transaxles
Pump Displacement	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)
Oil Capacity	1.1 gal. (4.4 qt.) each	1.1 gal. (4.4 qt.) each
Forward Speed	12.0 mph (19.3 km/hr.)	12.0 mph (19.3 km/hr.)
Reverse Speed	4.0 mph (6.4 km/hr.)	4.0 mph (6.4 km/hr.)
<b>WHEELS</b>		
Drive Wheel Size	24 x 10.5-12	24 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Bolt-On	Bolt-On
<b>SEAT</b>		
Description	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>		
3-year/2,000-hour Limited Warranty		

# REDEFINE EFFICIENCY.

No gas? No problem. The ZT6000e electric mower provides the premium cutting performance of its gas counterparts – while cutting down on emissions, maintenance and cost of ownership.



## PREMIUM CUTTING SYSTEM

Achieve a high-quality cut with the AirFX cutting system, which lifts the grass to the blade for a razor-sharp, uniform cut and a professional finish.

## EXCEPTIONAL RUNTIME

The ZT6000e provides up to 8 hours\* of runtime and mows up to 23.8 acres\*\*\* on a single charge.

## LOW COST OF OWNERSHIP

Powered by a maintenance-free lithium-ion battery, the ZT6000e eliminates the need for gas and delivers cost savings over time.

## ZERO EMISSIONS

Producing no emissions, the ZT6000e is an eco-friendly option for a growing number of businesses that prioritize sustainable business practices.

## MINIMAL MAINTENANCE

With a zero-maintenance battery and fewer parts that require repair or replacement, you'll spend less time maintaining your mower and more time cutting grass.

## QUIET OPERATION

Operators will appreciate the all-electric drivetrain, which eliminates the noise produced by gas-powered engines.

## CONVENIENT CHARGING

The ZT6000e features an on-board charger with a standardized connection point that accommodates either 240-volt or 120-volt connections.



# ZT6000e

## COMMERCIAL



MODEL NUMBER	M6126-P01-C01	M6126-P01-C02
<b>POWER</b>		
Battery Type	Lithium Ion	Lithium Ion
System Voltage	58 V	58 V
Gross Battery Capacity	20.4 kWh	20.4 kWh
Estimated Run Time	4-8 hr.*	4-8 hr.*
Mowable Acres	16.4-20.5 acres**	19.0-23.8 acres***
<b>POWER SYSTEM</b>		
Deck Motors	3 x (3 kW)	3 x (3 kW)
Wheel Drive Motors	2 x (3 kW)	2 x (3 kW)
Drive Description	HD Planetary Gearbox, Integrated Parking Brake	HD Planetary Gearbox, Integrated Parking Brake
Forward Speed	10.9 mph (17.5 km/hr.)	10.9 mph (17.5 km/hr.)
Reverse Speed	4.1 mph (6.5 km/hr.)	4.1 mph (6.5 km/hr.)
<b>DECK</b>		
Mower Deck	AirFX Cutting System	AirFX Cutting System
Available Widths	52.5 in. (1320 mm)	61.0 in. (1549 mm)
Cutting Height	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)
Blade Tip Speed	18,500 fpm	18,500 fpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>		
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	82.3 in. (2090) mm	83.2 in. (2114) mm
Machine Weight	1446 lb. (655 kg)	1459 lb. (661 kg)
<b>WHEELS</b>		
Rear	24 x 10.5-12	24 x 10.5-12
Front	15 x 6-6	15 x 6-6
<b>OPERATOR PLATFORM</b>		
Seat	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjust	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>		
Description	3-year/2,000-hour	3-year/2,000-hour
<b>CHARGING</b>		
On-Board 120V	12.6 hr.	12.6 hr.
On-Board 240V	6.3 hr.	6.3 hr.

\*Times and acreage will vary depending on conditions.

\*\*20.5 acres assumes 100% efficiency, i.e., straight-ahead operation with no overlap using the 52-inch deck at 9 mph. 16.4 acres assumes 80% efficiency and is more accurate to actual mowing capability using the 52-inch deck at 9 mph.

\*\*\*23.8 acres assumes 100% efficiency, i.e., straight-ahead operation with no overlap using the 61-inch deck at 9 mph. 19.0 acres assumes 80% efficiency and is more accurate to actual mowing capability using the 61-inch deck at 9 mph.

# COMFORTABLY TOUGH

Professional-quality performance and a smooth, comfortable ride make the ZT5000 a durable and versatile choice for all-day mowing in challenging conditions.



## ALL-DAY COMFORT

With a high-back deluxe suspension seat and ergonomic design, the ZT5000 surrounds you in comfort while putting the operator controls within easy reach.

## SMOOTH RIDE

24-inch drive tires provide ample ground clearance while minimizing ground disturbance.

## DUAL FUEL TANKS

Dual fuel tanks provide 7.8 gallons of total capacity for increased productivity – and fewer stops for fill-ups.

## COMMERCIAL-QUALITY PERFORMANCE

The reliable 23.5 hp Kawasaki FX series engine offers canister air filters, smooth power output and outstanding durability.

## SUPERIOR CUT

Featuring a deep-deck design that increases vacuum, the bullnose AirFX cutting system lifts the grass to the blade for a high-quality cut and professional finish.

## UNBEATABLE TORQUE

Designed for demanding jobs, the Hydro-Gear ZT-3800 transaxles deliver the performance and torque you need for all-day mowing.

## BUILT TO LAST

A heavy-duty yet lightweight steel-tubed frame provides the rugged durability to withstand even the most challenging mowing conditions.

<b>2000</b> HOURS	OR	<b>3</b> YEARS	LIMITED WARRANTY
----------------------	----	-------------------	---------------------



# ZT5000

## COMMERCIAL



MODEL NUMBER	9995001	9995002
<b>ENGINE</b>		
Model	Kaw FX730V	Kaw FX730V
Horsepower	23.5 hp (17.2 kW)	23.5 hp (17.2 kW)
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	7.8 gal. (29.5 L)	7.8 gal. (29.5 L)
Air Filter	Dual-Stage Canister	Dual-Stage Canister
<b>ELECTRICAL</b>		
Charging System	15 amp	15 amp
Clutch	125 lbf. (556 N)	125 lbf. (556 N)
<b>DECK</b>		
Mower Deck	AirFX Cutting System	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard
Width	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	4	6
Cutting Height	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)
Blade Tip Speed	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>		
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	76.0 in. (1930 mm)	81.7 in. (2076 mm)
Machine Weight (wet)	995 lb. (451 kg)	1043 lb. (473 kg)
<b>TRANSMISSION</b>		
Type	HG ZT-3800 Hydrostatic Transaxles	HG ZT-3800 Hydrostatic Transaxles
Pump Displacement	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	11.0 mph (17.7 km/hr.)	11.0 mph (17.7 km/hr.)
Reverse Speed	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)
<b>WHEELS</b>		
Drive Wheel Size	24 x 10.5-12	24 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Welded to Frame	Welded to Frame
<b>SEAT</b>		
Description	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>		
	3-year/2,000-hour Limited Warranty	

**ZS4000**  
COMMERCIAL

# STAND UP FOR A PERFECT CUT.

Stability. Agility. Profitability. With a compact size, extra ground clearance and large drive tires, the ZS4000 gets over and around obstacles and on to the next job.



## STAND-ON OPERATOR STATION

The operator-station design and internal fuel tank provide excellent “center of mass” stability for agility and maneuverability – even on uneven terrain.

## OPERATOR PAD

Maintain your mower efficiently with the easily removable operator pad.

## ANTI-VIBRATION PLATFORM

The vibration-dampening platform reduces fatigue for a smooth, comfortable ride. The platform can also be flipped up for use as a walk-behind mower.

## TOOL-FREE CONTROLS

Maintain total control right at your fingertips. Take command of the job with smooth, dampened controls and tool-free, adjustable tracking.

## BULLNOSE AIRFX DECK

A heavy-duty 48-, 52- or 61-inch AirFX deck with Air-Gap baffles and bolt-on, steel-fabricated spindles cuts the toughest, tallest grass down to size. Its innovative technology lifts grass to the cutting blade and gives you a cleaner cut.

If you require a 36-inch cut, a 36-inch ZS4000 is also available with the tough, adjustable DuraDeck cutting system.

## POWERFUL ENGINE PERFORMANCE

Efficiently power through the workday and take on jobs of all sizes with Kawasaki engine options from 19.0-26.0 hp.

## HYDRO-GEAR ZT-3100 OR ZT-3400 HYDROSTATIC TRANSMISSION

Provides all the torque you need for long hours and smooth operation.

**2000**  
HOURS

OR

**3**  
YEARS

LIMITED  
WARRANTY





# ZS4000

## COMMERCIAL



MODEL NUMBER	9994001	9994002	9994003	9994004
<b>ENGINE</b>				
Model	Kaw FX600V	Kaw FX651V	Kaw FT730V EFI	Kaw FT730V EFI
Horsepower	19.0 hp (14.1 kW)	20.5 hp (15.2 kW)	26.0 hp (19.3 kW)	26.0 hp (19.3 kW)
Displacement	36.7 cu. in. (603 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	5.1 gal. (19.3 L)	6.5 gal. (24.6 L)	6.5 gal. (24.6 L)	6.5 gal. (24.6 L)
Air Filter	Dual Element	Dual Element	Dual Element	Dual Element
<b>ELECTRICAL</b>				
Charging System	15 amp	15 amp	15 amp	15 amp
Clutch	125 lbf. (556 N)	200 lbf. (889 N)	200 lbf. (889 N)	200 lbf. (889 N)
<b>DECK</b>				
Mower Deck	DuraDeck Cutting System	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System
Leading Edge	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard
Width	36.0 in. (914 mm)	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	4	4	7
Cutting Height	1.5-4.5 in. (38-114 mm)	1.5-4.5 in. (38-114 mm)	1.5-4.5 in. (38-114 mm)	1.5-4.5 in. (38-114 mm)
Blade Tip Speed	17,600 fpm @ 3550 Engine rpm	17,800 fpm @ 3550 Engine rpm	18,586 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>				
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	64.0 in. (1625 mm)	64.0 in. (1625 mm)	64.0 in. (1625 mm)	64.0 in. (1625 mm)
Machine Weight (wet)	800 lb. (362 kg)	961 lb. (435 kg)	991 lb. (449 kg)	1028 lb. (466 kg)
<b>TRANSMISSION</b>				
Type	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	0.6 cu. in. (10 cc)	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	9.0 mph (14.4 km/hr.)	10.5 mph (16.8 km/hr.)	10.5 mph (16.8 km/hr.)	10.5 mph (16.8 km/hr.)
Reverse Speed	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)
<b>WHEELS</b>				
Drive Wheel Size	20 x 8-10	23 x 8.5-12	23 x 10.5-12	23 x 10.5-12
Front Caster Wheel Size	11 x 6-5	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Bolt-On	Bolt-On	Bolt-On	Bolt-On
<b>OPERATOR PLATFORM</b>				
Adjustment	Flip Up and Latch	Flip Up and Latch	Flip Up and Latch	Flip Up and Latch
Rider Pad	Removable for Service	Removable for Service	Removable for Service	Removable for Service
Vibration Isolation	Dampened			
WARRANTY	3-year/2,000-hour Limited Warranty			

# MAKE ANY JOB LOOK LIKE A WALK IN THE PARK.

The WB700 is a commercial, mid-size walk-behind mower with a powerful hydraulic drive that fights operator fatigue and minimizes ground disturbance. Its compact size takes up less space on your trailer and gives you more precision for mowing around obstacles and highly landscaped environments.



## HYDRAULIC DRIVE

No effort. No sweat. Power forward and reduce fatigue when handling long days on the job.

## COMPACT SIZE

Command precision maneuverability for obstacles and highly landscaped environments. It also takes up less space on an owner's trailer.

## EASY OPERATION

The ergonomic handle design and intuitive control layout keep you mowing confidently and comfortably.



**2000**  
HOURS

OR

**3**  
YEARS

LIMITED  
WARRANTY

## HIGH-PERFORMANCE ENGINE

Commercially proven Kawasaki FS-series engines from 14.5-18.5 hp deliver reliable performance for long hours and tough jobs.

## COMMERCIAL-GRADE TRANSMISSION

The innovative Hydro-Gear ZT-2800 hydrostatic transaxles with charge pumps deliver smooth and simple operation with heavy-duty output torque and comfortable ground speeds of up to 6.5 mph.

## COMMERCIAL CUTTING CAPABILITY

The 36-, 48- or 52-inch TufDeck cutting system has durable, steel-fabricated spindle assemblies to handle tough mowing in tight areas.

## 20-INCH DRIVE TIRES

The large wheels provide ample ground clearance to minimize ground disturbance and enable smooth, easy maneuverability on tough terrain.

# WB700

## COMMERCIAL



MODEL NUMBER	9990701	9990702	9990703
<b>ENGINE</b>			
Model	Kaw FS481V	Kaw FS541V	Kaw FS600V
Horsepower	14.5 hp (10.8 kW)	15.0 hp (11.1 kW)	18.5 hp (13.7 kW)
Displacement	36.8 cu. in. (603 cc)	36.8 cu. in. (603 cc)	36.8 cu. in. (603 cc)
Fuel Capacity	5.0 gal. (18.9 L)	5.0 gal. (18.9 L)	5.0 gal. (18.9 L)
Air Filter	Dual Element	Dual Element	Dual Element
<b>ELECTRICAL</b>			
Charging System	15 amp	15 amp	15 amp
Clutch	105 lbf. (467 N)	105 lbf. (467 N)	105 lbf. (467 N)
<b>DECK</b>			
Mower Deck	TufDeck Cutting System	TufDeck Cutting System	TufDeck Cutting System
Width	36.0 in. (914 mm)	48.0 in. (1219 mm)	52.0 in. (1320 mm)
Adjustable Anti-Scalp Rollers	—	3	3
Cutting Height	1.5-4.5 in. (38-114 mm)	1.5-4.5 in. (38-114 mm)	1.5-4.5 in. (38-114 mm)
Blade Tip Speed	17,950 fpm @ 3550 Engine rpm	16,832 fpm @ 3550 Engine rpm	18,645 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>			
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	78.0 in. (1981 mm)	78.0 in. (1981 mm)	78.0 in. (1981 mm)
Machine Weight (wet)	773 lb. (350 kg)	789 lb. (357 kg)	832 lb. (377 kg)
<b>TRANSMISSION</b>			
Type	HG ZT-2800 Hydrostatic Transaxles With Charge Pumps	HG ZT-2800 Hydrostatic Transaxles With Charge Pumps	HG ZT-2800 Hydrostatic Transaxles With Charge Pumps
Pump Displacement	0.7 cu. in. (10 cc)	0.7 cu. in. (10 cc)	0.7 cu. in. (10 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	6.5 mph (10.5 km/hr.)	6.5 mph (10.5 km/hr.)	6.5 mph (10.5 km/hr.)
Reverse Speed	3.0 mph (4.8 km/hr.)	3.0 mph (4.8 km/hr.)	3.0 mph (4.8 km/hr.)
<b>WHEELS</b>			
Drive Wheel Size	20 x 6.5	20 x 8	20 x 8
Front Caster Wheel Size	11 x 6 Semi-pneumatic	11 x 6 Semi-pneumatic	11 x 6 Semi-pneumatic
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame
<b>WARRANTY</b>	3-year/2,000-hour Limited Warranty		

**ZT3500**

ENTRY-LEVEL COMMERCIAL

# YOUR TURF. YOUR TERMS.

We built the ZT3500 to deliver commercial-grade durability and performance at an affordable price. Convenient maintenance and all-day mowing comfort make the ZT3500 the perfect machine for anyone ready to take on the toughest turf.



## HIGH-PERFORMANCE ENGINE

Mow down any challenge with ease, thanks to a powerful Kawasaki FX series engine from 20.5-23.5 hp.

## PRO-GRADE TRANSMISSION

Rely on smooth and steady mowing power – even at top speeds – with the durable Hydro-Gear ZT-3400 hydrostatic transaxles.

## TUFDECK PRO CUTTING SYSTEM

The system features professional-grade, steel-fabricated spindle assemblies.

## 23-INCH DRIVE TIRES

Large tires offer great control and a smooth ride.

## OPTIMAL USER COMFORT

A high-backed mechanical suspension seat and ergonomic controls keep you comfortable all day long.

## DUAL FUEL TANKS

Stay focused on the turf, not on your fuel. Rugged, roto-molded dual tanks give you 7.8 gallons of fuel capacity.

## QUICK GROUND SPEEDS

Make quick work out of big jobs with a productive ground speed of 10 mph.

<b>1000</b> HOURS	OR	<b>3</b> YEARS	LIMITED WARRANTY
----------------------	----	-------------------	---------------------

# ZT3500

## ENTRY-LEVEL COMMERCIAL



MODEL NUMBER	9993501	9993502	9993503
<b>ENGINE</b>			
Model	Kaw FX651V	Kaw FX691V	Kaw FX730V
Horsepower	20.5 hp (15.2 kW)	22.0 hp (16.4 kW)	23.5 hp (17.5 kW)
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	7.8 gal. (29.5 L)	7.8 gal. (29.5 L)	7.8 gal. (29.5 L)
Air Filter	Dual-Stage Canister	Dual-Stage Canister	Dual-Stage Canister
<b>ELECTRICAL</b>			
Charging System	15 amp	15 amp	15 amp
Clutch	125 lbf. (556 N)	125 lbf. (556 N)	125 lbf. (556 N)
<b>DECK</b>			
Mower Deck	TufDeck Pro Cutting System	TufDeck Pro Cutting System	TufDeck Pro Cutting System
Width	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	3	7
Cutting Height	1.5-4.8 in. (38-121 mm)	1.5-4.6 in. (38-117 mm)	1.5-4.6 in. (38-117 mm)
Blade Tip Speed	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>			
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	76.0 in. (1930 mm)	76.0 in. (1930 mm)	79.0 in. (2006 mm)
Machine Weight	773 lb. (350 kg)	789 lb. (357 kg)	832 lb. (377 kg)
<b>TRANSMISSION</b>			
Type	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles
Pump Displacement	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)	0.7 cu. in. (12 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	10.0 mph (16.0 km/hr.)	10.0 mph (16.0 km/hr.)	10.0 mph (16.0 km/hr.)
Reverse Speed	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)
<b>WHEELS</b>			
Drive Wheel Size	23 x 10.5-12	23 x 10.5-12	23 x 10.5-12
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame
<b>SEAT</b>			
Description	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat	High Back, Full Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>		3-year/1,000-hour Limited Warranty	

# BUILT FOR THE TOUGHEST CUSTOMER: YOU

Pride in a job well done. That's the ZT3000 sweet spot. With top reliability and power for the job, you'll get a quality cut no matter how many acres you maintain.



#### ROBUST FUEL TANK

Get the job done and worry less about refueling. The rugged, roto-molded and impact-resistant fuel tank has a 3.8-gallon capacity.

#### COMPLETE COMFORT

Enjoy ergonomically engineered controls and a high-backed spring suspension seat.



#### HIGH-PERFORMANCE ENGINE

Built for those who want to mow like the pros, the Kawasaki FT series engine from 20.0-24.0 hp gives you dependable engine performance.

#### COMMERCIAL-GRADE TRANSMISSION

Charge into the job with smooth operation and precise maneuverability. The Hydro-Gear ZT-3100 hydrostatic transaxles provide reliability and speed to tackle turf faster.

#### SOLID, TUBULAR FRAME

Constructed with a lightweight, durable 1.5 x 2.5-inch steel-tubed frame.

#### TOUGH MOWER DECKS

The 48-, 52- or 61-inch TufDeck Pro cutting system features professional-grade, steel-fabricated spindles for maximum durability and high-quality results.

**1000**  
HOURS

OR

**3**  
YEARS

LIMITED  
WARRANTY

# ZT3000

## RESIDENTIAL



MODEL NUMBER	9993001	9993002	9993003
<b>ENGINE</b>			
Model	Kaw FT651V	Kaw FT691V	Kaw FT730V
Horsepower	20.0 hp (14.9 kW)	22.0 hp (16.4 kW)	24.0 hp (17.8 kW)
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)
Air Filter	Dual Element	Dual Element	Dual Element
<b>ELECTRICAL</b>			
Charging System	15 amp	15 amp	15 amp
Clutch	125 lbf. (556 N)	125 lbf. (556 N)	125 lbf. (556 N)
<b>DECK</b>			
Mower Deck	TufDeck Pro Cutting System	TufDeck Pro Cutting System	TufDeck Pro Cutting System
Width	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)
Adjustable Anti-Scalp Rollers	3	3	7
Cutting Height	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)
Blade Tip Speed	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>			
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)
Machine Weight (wet)	758 lb. (343 kg)	774 lb. (351 kg)	817 lb. (370 kg)
<b>TRANSMISSION</b>			
Type	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles
Pump Displacement	0.6 cu. in. (10 cc)	0.6 cu. in. (10 cc)	0.6 cu. in. (10 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	8.0 mph (12.8 km/hr.)	8.0 mph (12.8 km/hr.)	8.0 mph (12.8 km/hr.)
Reverse Speed	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)	3.5 mph (5.6 km/hr.)
<b>WHEELS</b>			
Drive Wheel Size	22 x 11-10	22 x 11-10	22 x 11-10
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame
<b>SEAT</b>			
Description	High-Back, EVC and Spring Suspension Seat	High-Back, EVC and Spring Suspension Seat	High-Back, EVC and Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
WARRANTY	3-year/1,000-hour Limited Warranty		

# YOUR HOME IS WHERE ONE TOUGH ANIMAL PLAYS.

The ZT2000 brings more commercial features than other zero-turn mowers in the same price range. It's the perfect zero-turn mower for people like you who want durability and a professional cut at an affordable price.



## ENGINE PERFORMANCE

The ZT2000 is equipped with Kawasaki FR series engine options from 21.5-23.0 hp for powerful, pro-grade performance.

## COMMERCIAL-GRADE TRANSMISSION

The innovative Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with heavy-duty output torque and ground speeds up to 7 mph.

## STURDY STEEL FRAME

The 1.5 x 2.5-inch steel-tubed frame is lightweight and rugged.

## COMMERCIAL CUTTING CAPABILITY

The 42-, 48- or 52-inch TufDeck cutting system has durable, steel-fabricated spindle assemblies to handle the toughest jobs.

## COMPLETE COMFORT

A high-backed spring suspension seat keeps you comfortable even during the longest jobs.

## ALL-DAY FUEL CAPACITY

Impact-resistant, 3.8-gallon capacity keeps you mowing.

**500 HOURS** OR **3 YEARS** LIMITED WARRANTY





# ZT2000

## RESIDENTIAL



MODEL NUMBER	9992001	9992002	9992003
<b>ENGINE</b>			
Model	Kaw FR651V	Kaw FR651V	Kaw FR691V
Horsepower	21.5 hp (16.0 kW)	21.5 hp (16.0 kW)	23.0 hp (17.1 kW)
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)
Air Filter	Dual Element	Dual Element	Dual Element
<b>ELECTRICAL</b>			
Charging System	15 amp	15 amp	15 amp
Clutch	105 lbf. (467 N)	105 lbf. (467 N)	105 lbf. (467 N)
<b>DECK</b>			
Mower Deck	TufDeck Cutting System	TufDeck Cutting System	TufDeck Cutting System
Width	42.0 in. (1066 mm)	48.0 in. (1219 mm)	52.0 in. (1320 mm)
Adjustable Anti-Scalp Rollers	2	3	3
Cutting Height	1.5-4.6 in. (38-117 mm)	1.5-4.6 in. (38-117 mm)	1.5-4.6 in. (38-117 mm)
Blade Tip Speed	18,809 fpm @ 3550 Engine rpm	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
<b>FRAME</b>			
Front and Rear	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
Machine Length	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)
Machine Weight (wet)	684 lb. (310 kg)	736 lb. (333 kg)	752 lb. (341 kg)
<b>TRANSMISSION</b>			
Type	HG ZT-2800 Hydrostatic Transaxles	HG ZT-2800 Hydrostatic Transaxles	HG ZT-2800 Hydrostatic Transaxles
Pump Displacement	0.6 cu. in. (10 cc)	0.6 cu. in. (10 cc)	0.6 cu. in. (10 cc)
Oil Capacity	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)	1.0 gal. (4.0 qt.)
Forward Speed	7.0 mph (11.2 km/hr.)	7.0 mph (11.2 km/hr.)	7.0 mph (11.2 km/hr.)
Reverse Speed	3.0 mph (4.8 km/hr.)	3.0 mph (4.8 km/hr.)	3.0 mph (4.8 km/hr.)
<b>WHEELS</b>			
Drive Wheel Size	20 x 8-10	20 x 10-10	20 x 10-10
Front Caster Wheel Size	11 x 6-5	11 x 6-5	11 x 6-5
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame
<b>SEAT</b>			
Description	High Back, Spring Suspension Seat	High Back, Spring Suspension Seat	High Back, Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
<b>WARRANTY</b>			
		3-year/500-hour Limited Warranty	

# THE BEST WARRANTY FOR YOUR MOWER

You rely on your mowers – whether it's to get work done fast or generate business income. Either way, when you buy a Bobcat zero-turn mower, you get an industry-leading warranty that covers your investment – up to 2,000 hours.

## PROTECTION PLUS® EXTENDED WARRANTY

Get more warranty for more peace of mind. Pick the plan that's right for you with extended warranty options up to 5 years and 2,500 hours.

MODEL	STANDARD WARRANTY		EXTENDED WARRANTY			
	HOURS	YEARS	HOURS	YEARS	HOURS	YEARS
ZT7000	2,000	3	2,250	4	2,500	5
ZT6100	2,000	3	2,250	4	2,500	5
ZT6000	2,000	3	2,250	4	2,500	5
ZT6000e	2,000	3	–	–	–	–
ZT5000	2,000	3	2,250	4	2,500	5
ZS4000	2,000	3	2,250	4	2,500	5
WB700	2,000	3	2,250	4	2,500	5
ZT3500	1,000	3	1,100	4	1,200	5
ZT3000	1,000	3	1,100	4	1,200	5
ZT2000	500	3	1,100	4	1,200	5



## PARTS AND ACCESSORIES

Shop by Bobcat model to get the parts and accessories you need.


	ZT7000	ZT6100	ZT6000	ZT6000e	ZT5000	ZS4000	WB700	ZT3500	ZT3000	ZT2000
Mulch Kit	61 in.	●	●	●	●	●	●	●	●	●
ECO Plate	●	●	●	●	●	●	●	●	●	●
Grass Catcher: Poly-Dump, 3.75- or 5-Bushel	61 in.	●	●	●	●	●	●	●	●	●
Weight Kit	–	–	–	–	–	●	–	–	–	–
Seat Suspension Kit	–	–	–	–	–	–	–	–	●	●
BOSS-Vac Pro 12-Bushel Collection System	61 in.	●	●	–	–	–	–	–	–	–
BOSS-Vac 8-Bushel Collection System	–	–	–	–	●	–	–	52 in., 61 in.	–	–
Deck Striping Kit	●	●	●	●	●	48 in., 52 in., 61 in.	–	●	●	48 in., 52 in.
ZT Hitch Kit	–	–	●	–	●	–	–	●	●	●
No-Flat Caster Wheel Options	–	●	●	–	●	●	–	●	●	●
Magnetic Light Kit, 12V	●	●	●	–	●	●	–	●	●	●
Light Kit, Footplate	–	●	●	–	–	–	–	–	–	–
ROPS Kit	–	–	–	–	–	–	–	–	●	●
ROPS Canopy Kit	●	●	●	●	●	–	–	●	●*	●*
Sulky Kit	–	–	–	–	–	–	●	–	–	–

\*ROPS kit required



# One Tough Animal<sup>®</sup>

## B O B C A T T I M E L I N E

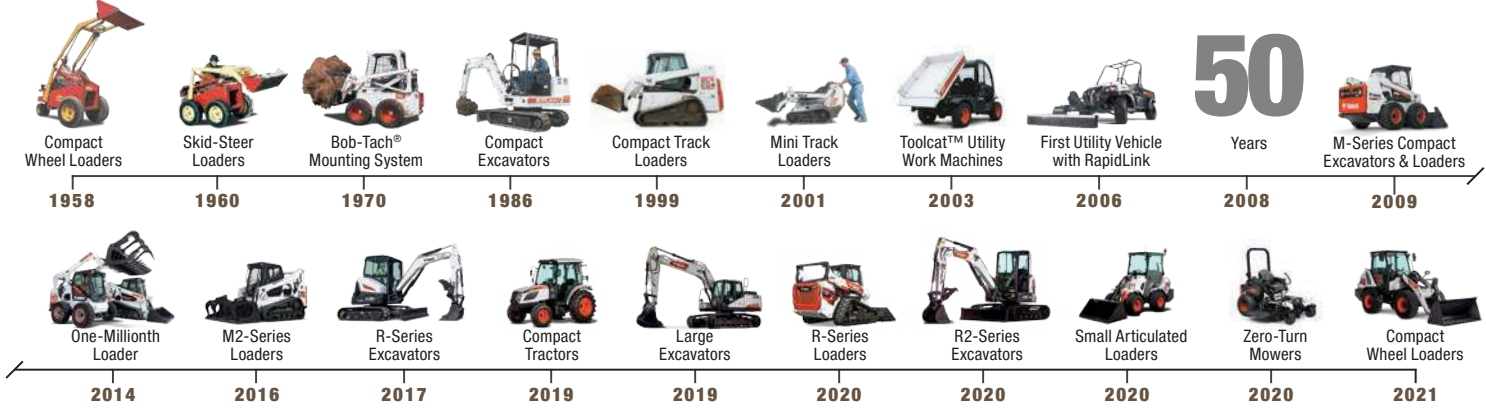



# YOU ARE ONE TOUGH ANIMAL.®

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.

**DOOSAN**

**Bobcat Company is a member of the Doosan Group.** Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat® and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2024 Bobcat Company. All rights reserved.



Printed on 10% recycled paper

B-3000 (04/24)  
EP-XX-0424-13679-F

**Bobcat Company**

250 East Beaton Drive • West Fargo, ND 58078

[Bobcat.com](http://Bobcat.com)



**Bobcat®**

***One Tough Animal.***